

【 Zoiper How to setup 】


iPhone Ver.

Go to the Apple Store, Search “**Zoiper Lite voip soft phone**” and will install it as free.


Then I will show you the VoIP+ phone settings.

1. Installation of Zoiper Lite soft phone


1-1. Tap on **App Store**.

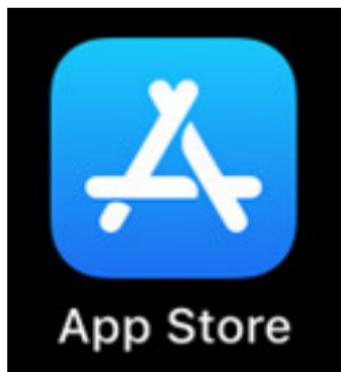

1-2. Please tap the “**search**” button, which is on the bottom right.

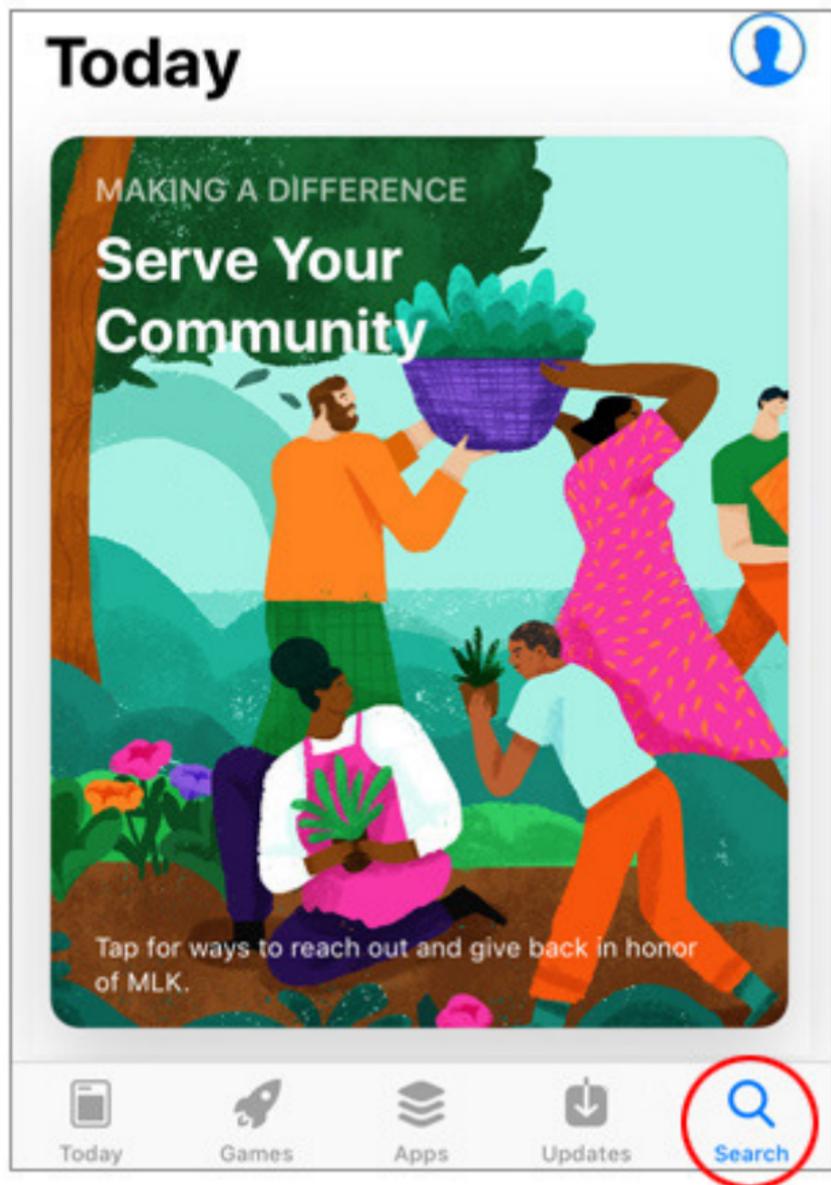


1-3. The search screen will be displayed.

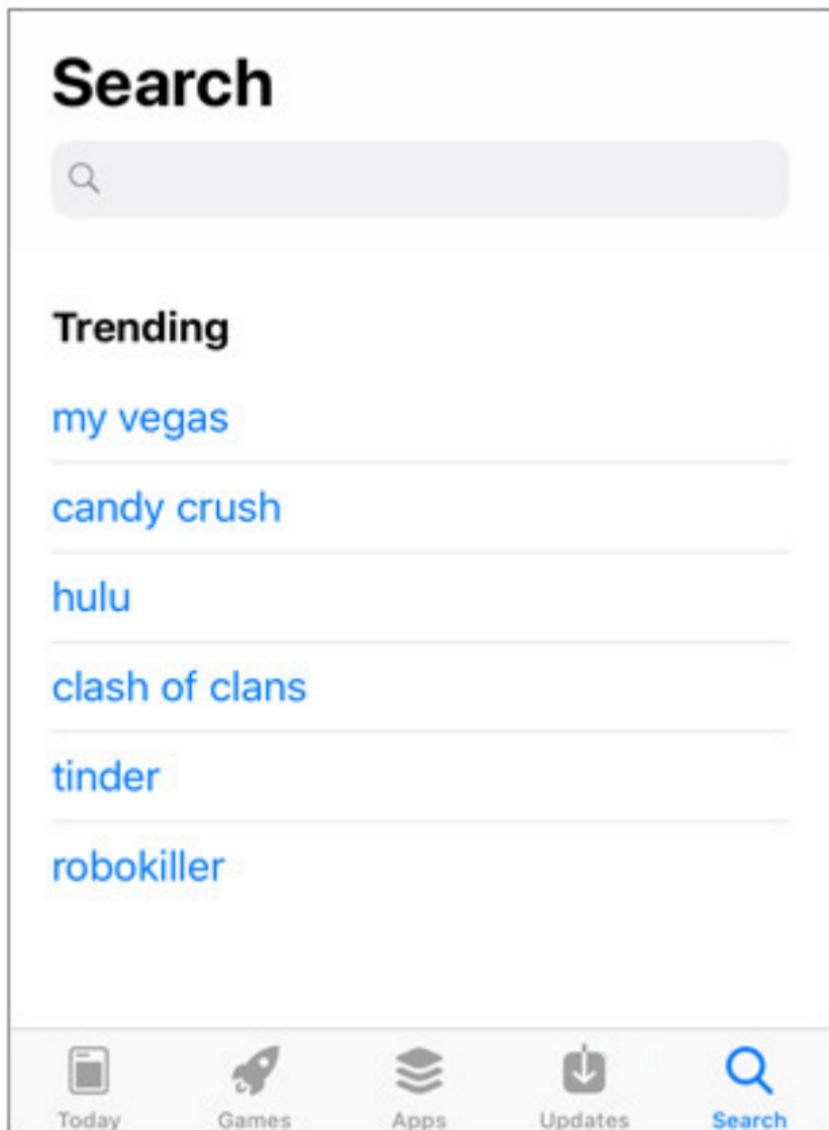

1-4. Search input keywords "**zoiper**"


After entering, tap the "**Search**" button.

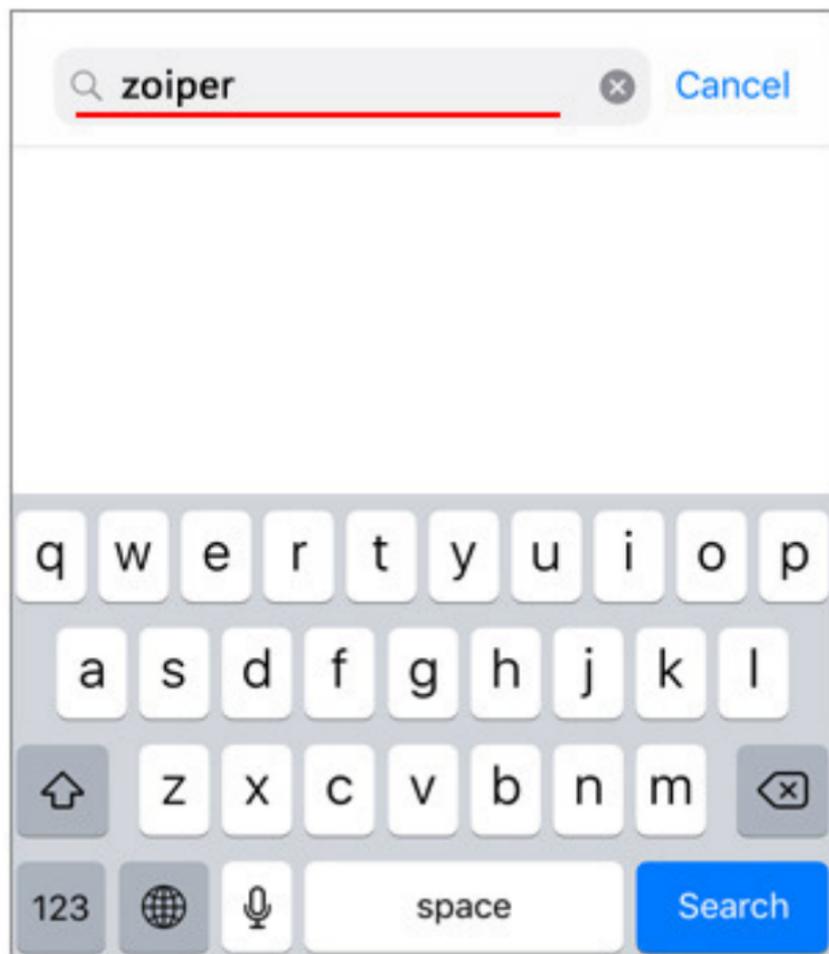

1-5. It will appear as **“Zoiper Lite voip soft...”** as shown in the image below.

You will install this software in the iPhone.

Please tap the mark of the arrow with the cloud.

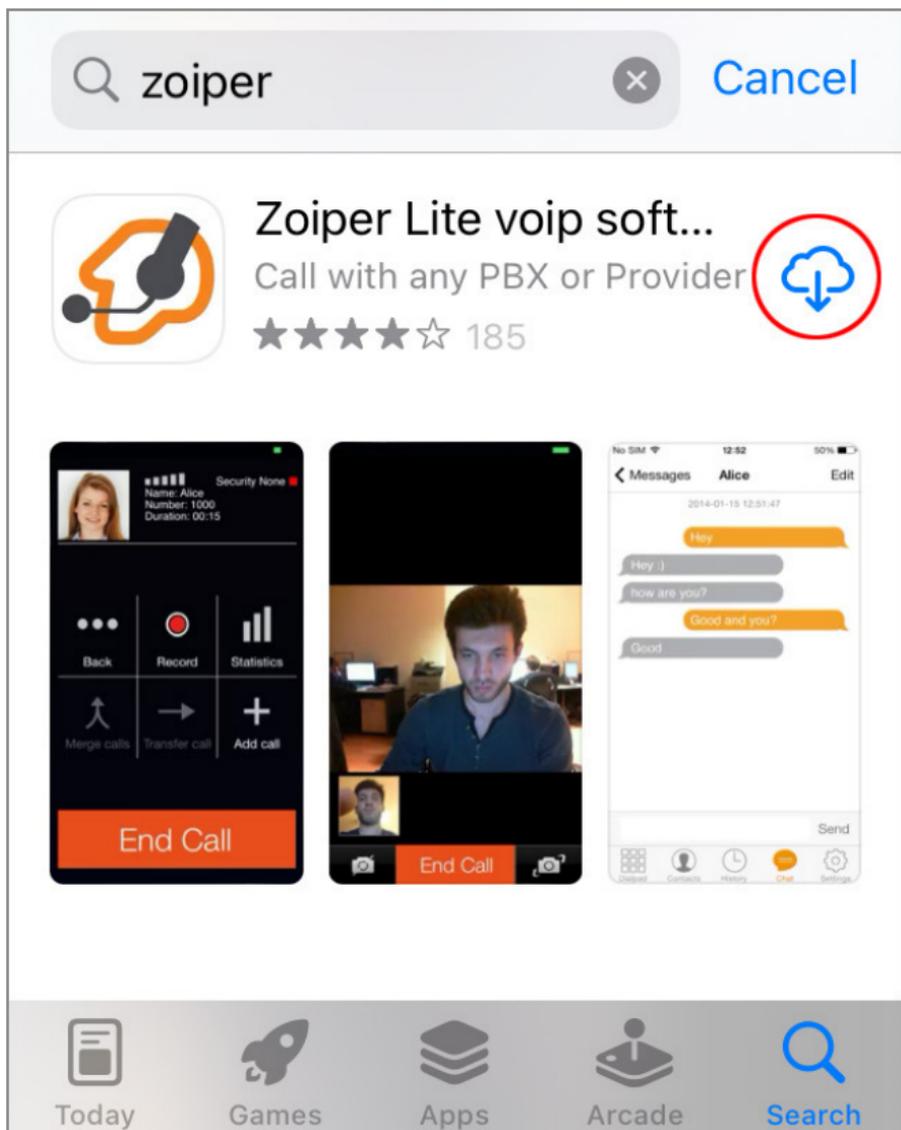

1-6. The mark of the cloud will be changed to display that turns round.



Zoiper Lite voip soft phone

Securax Ltd.



When the "**Open**" button is displayed, installation is completed.

[< Search](#)



Zoiper Lite voip soft phone

Securax Ltd.

OPEN



185 RATINGS

4.0



AGE

4+

Years Old

CATEGORY



Productivity

What's New

[Version History](#)

Version 3.46

1y ago



Today



Games



Apps



Arcade




Search

2. Configuration of Wave Lite

2-1. Next, tap the button "**Open**" to start up Zoiper. You will setup the VoiP+.

Let's start by tapping Zoiper.

Always keep Zoiper running, to wait for incoming calls.

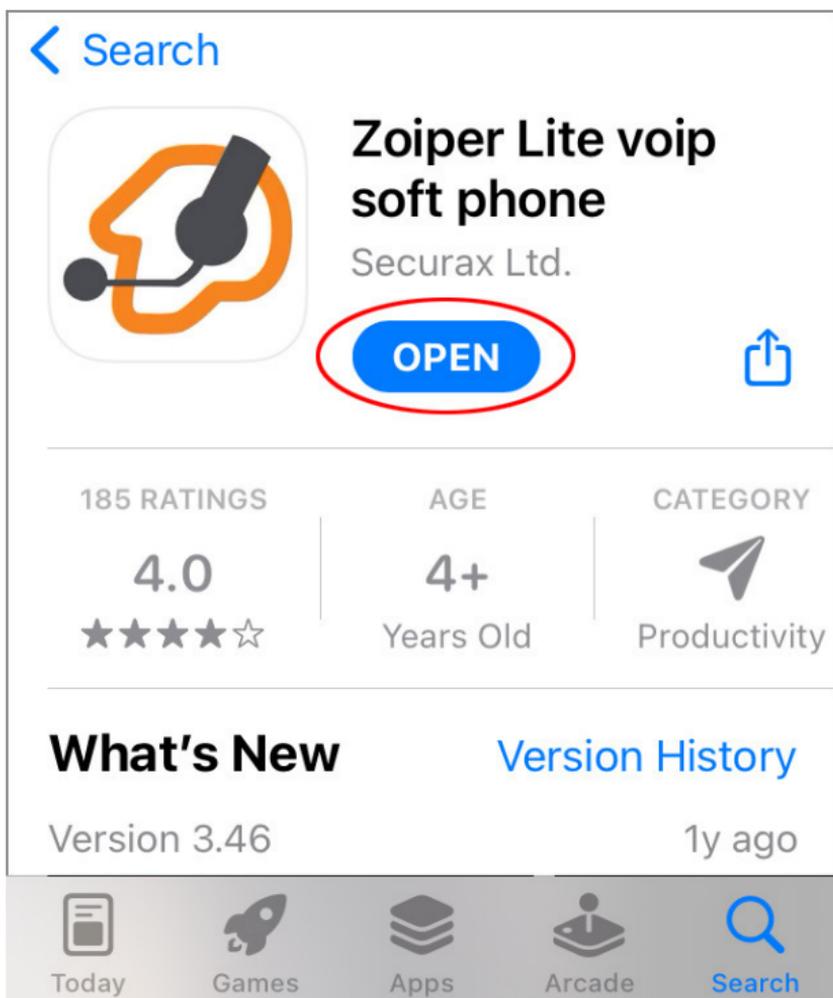

The screenshot shows the app page for "Zoiper Lite voip soft phone" by Securax Ltd. The app icon is a stylized orange head with a black headset. The title "Zoiper Lite voip soft phone" is in bold black text, with "Securax Ltd." below it. A blue "OPEN" button is circled in red. To the right is a share icon. Below the app name are three sections: "185 RATINGS" with a 4.0 star rating (four full stars and one half star), "AGE" with "4+ Years Old", and "CATEGORY" with a paper plane icon and "Productivity". At the bottom, there are two tabs: "What's New" and "Version History". Under "What's New", it says "Version 3.46" and "1y ago". The bottom navigation bar has icons for "Today", "Games", "Apps", "Arcade", and "Search".

[Search](#)

 **Zoiper Lite voip soft phone**
Securax Ltd.

OPEN 

185 RATINGS AGE CATEGORY

4.0 **4+** 


★★★★☆ Years Old Productivity

What's New [Version History](#)


Version 3.46 1y ago

 Today  Games  Apps  Arcade  [Search](#)


2-2. "Zoiper" Would Like to Send You Notifications. As it is displayed, Let's tap "**Allow**".

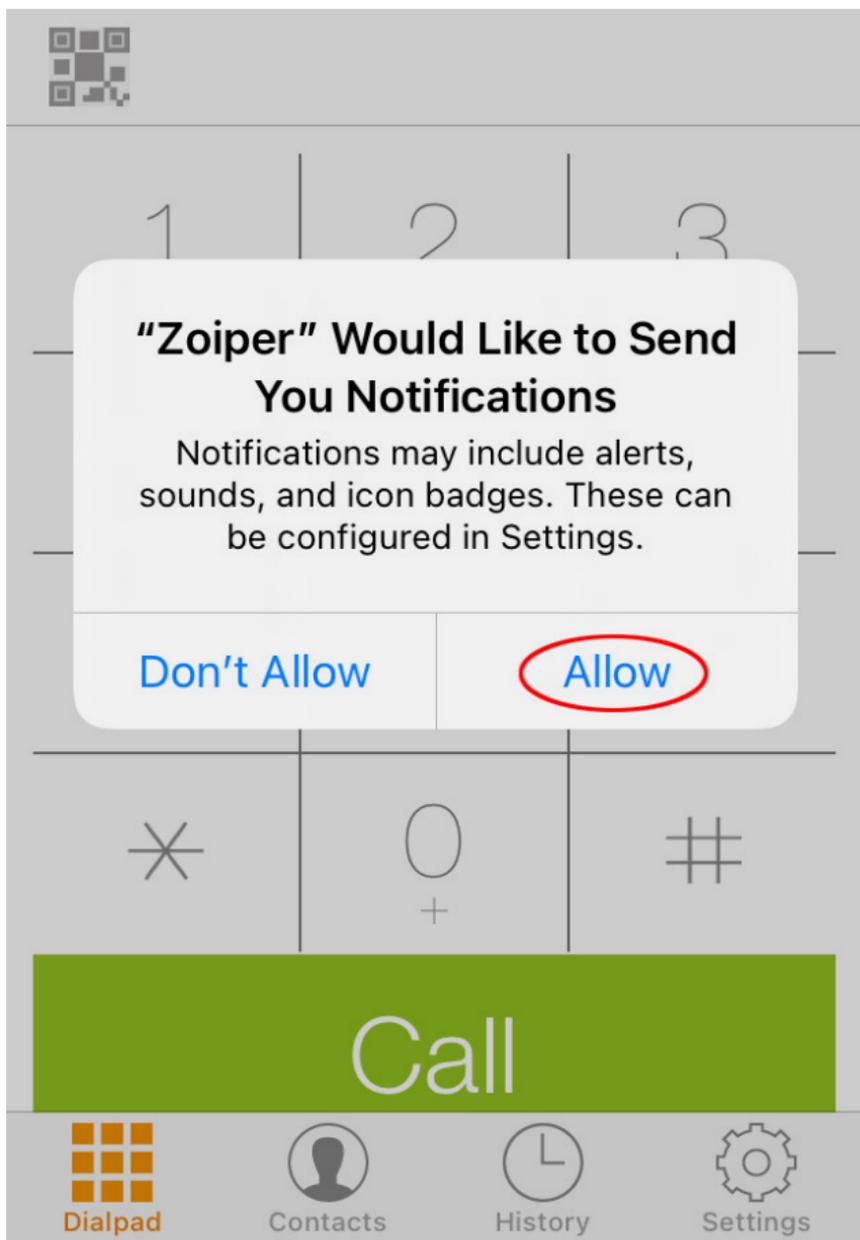


2-3. Next, "Zoiper" Would Like to Access the Microphone. As it is displayed, let's tap "OK".

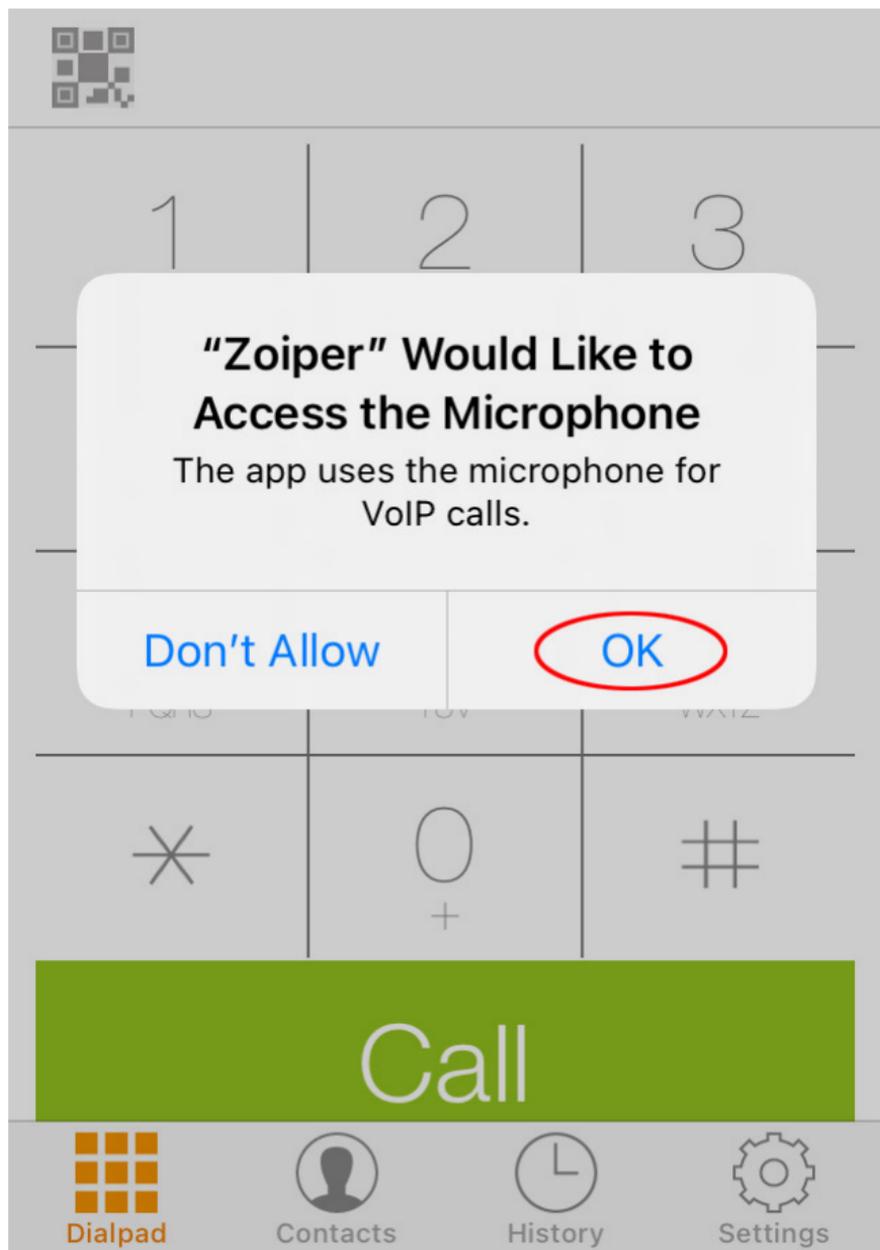


2-4. "Zoiper" Would Like to Access the Camera.
As it is displayed, let's tap "OK".

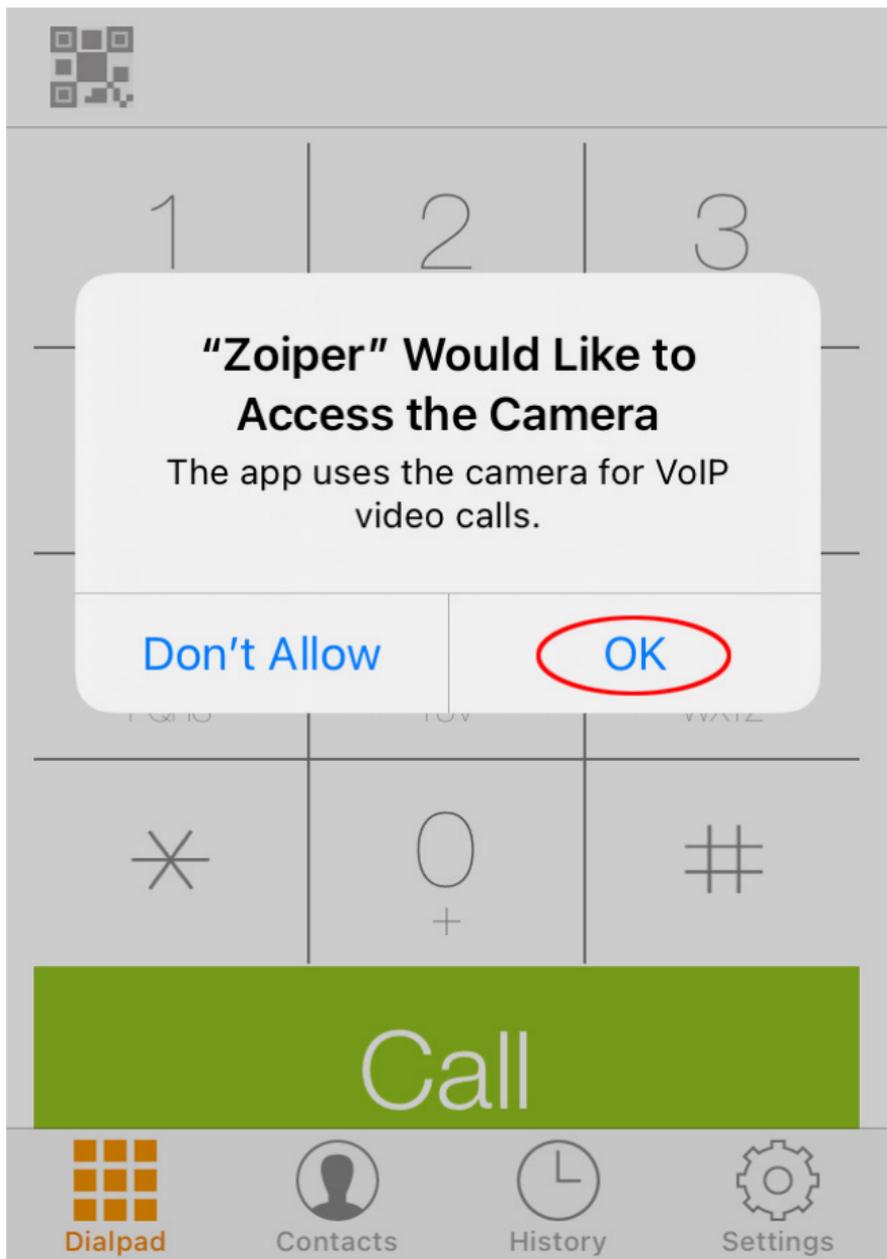


2-5. "Zoiper" Would Like to Access Your Contacts.
As it is displayed, let's tap "OK".

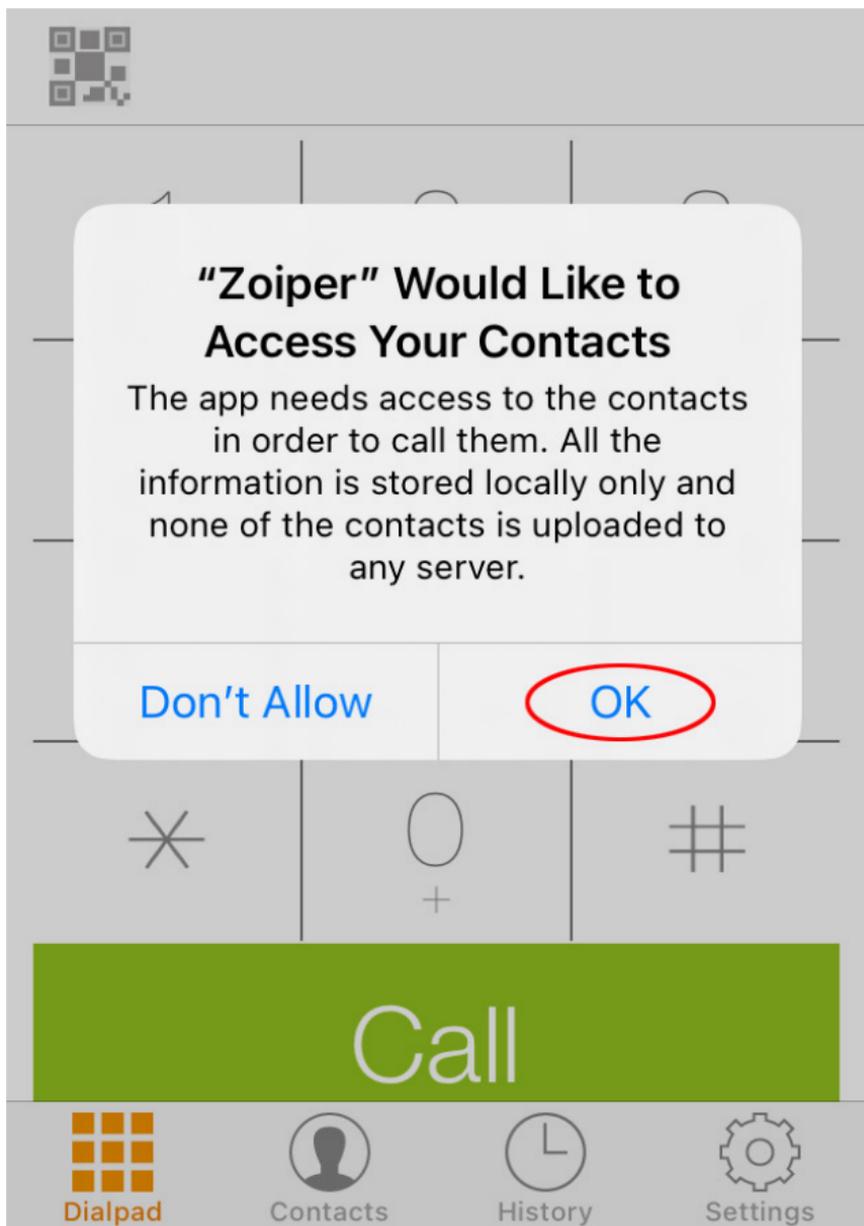

2-6. GS Wave is now launched. You will set up VoiP+ now. Please tap the "**Settings**" of the Gear mark at the bottom of the far right end.

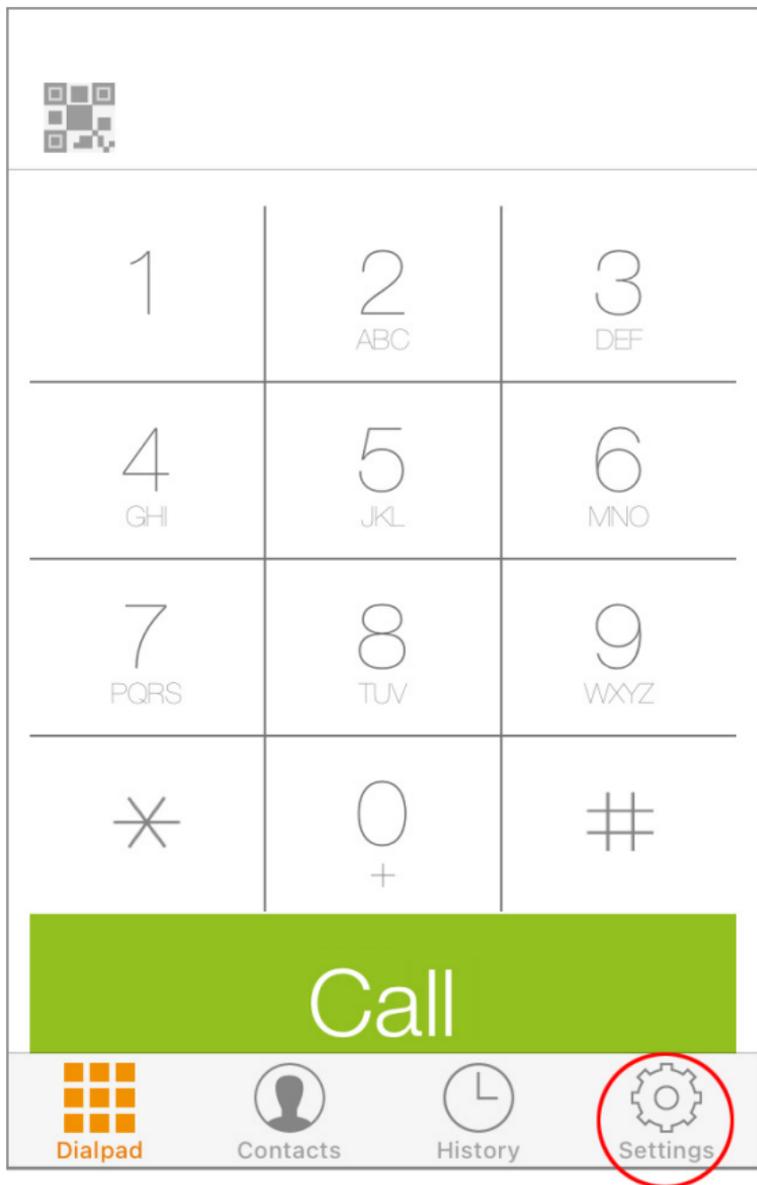


2-7. Next, tap the “**Accounts**” of this top row.

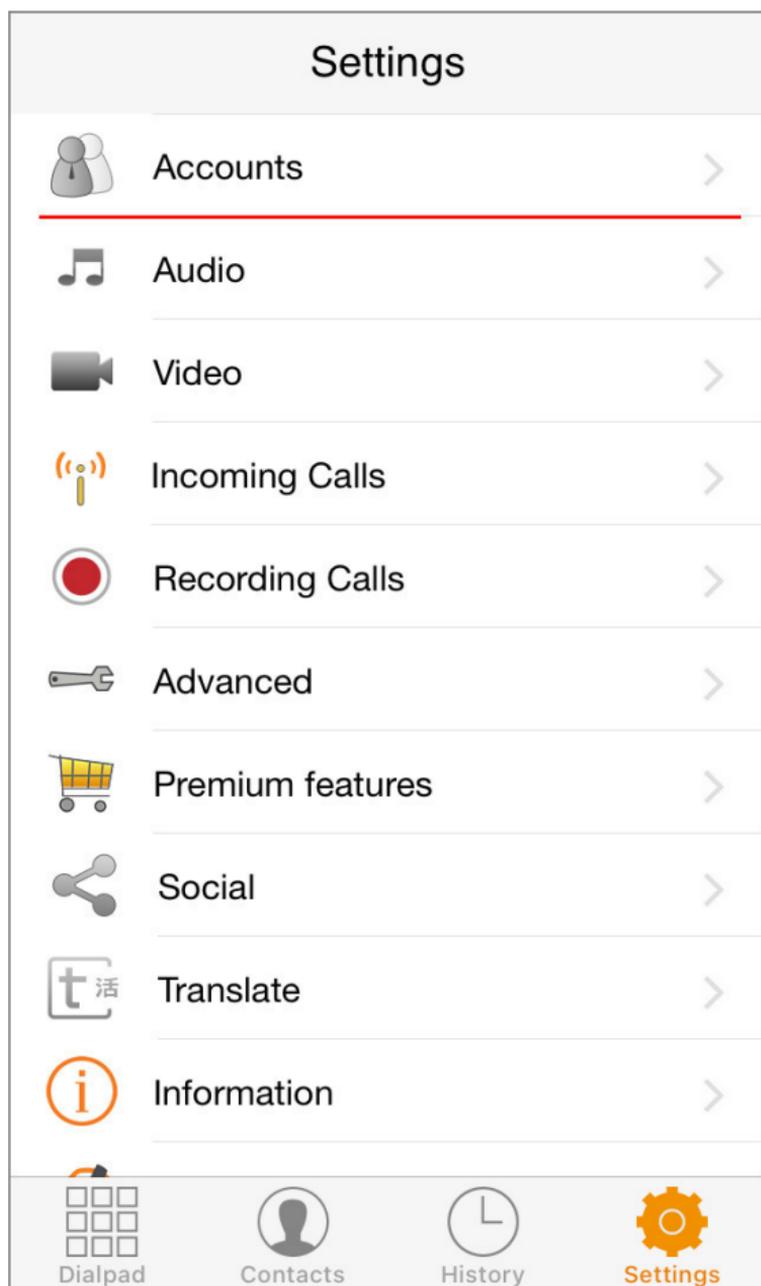


2-8. Details of account settings are displayed. But You don't have setting and the lower is blank.


So, tap the “+” (mark of addition) on the upper right.

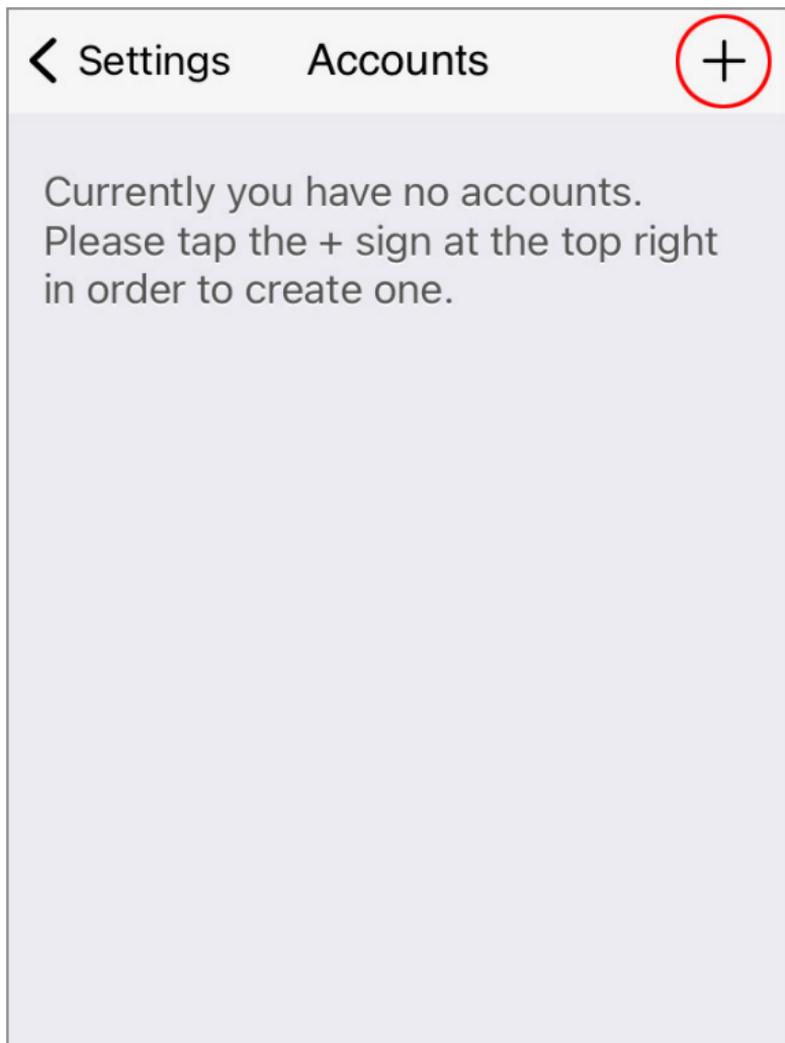

2-9. The extension account is ready, so tap "Yes".

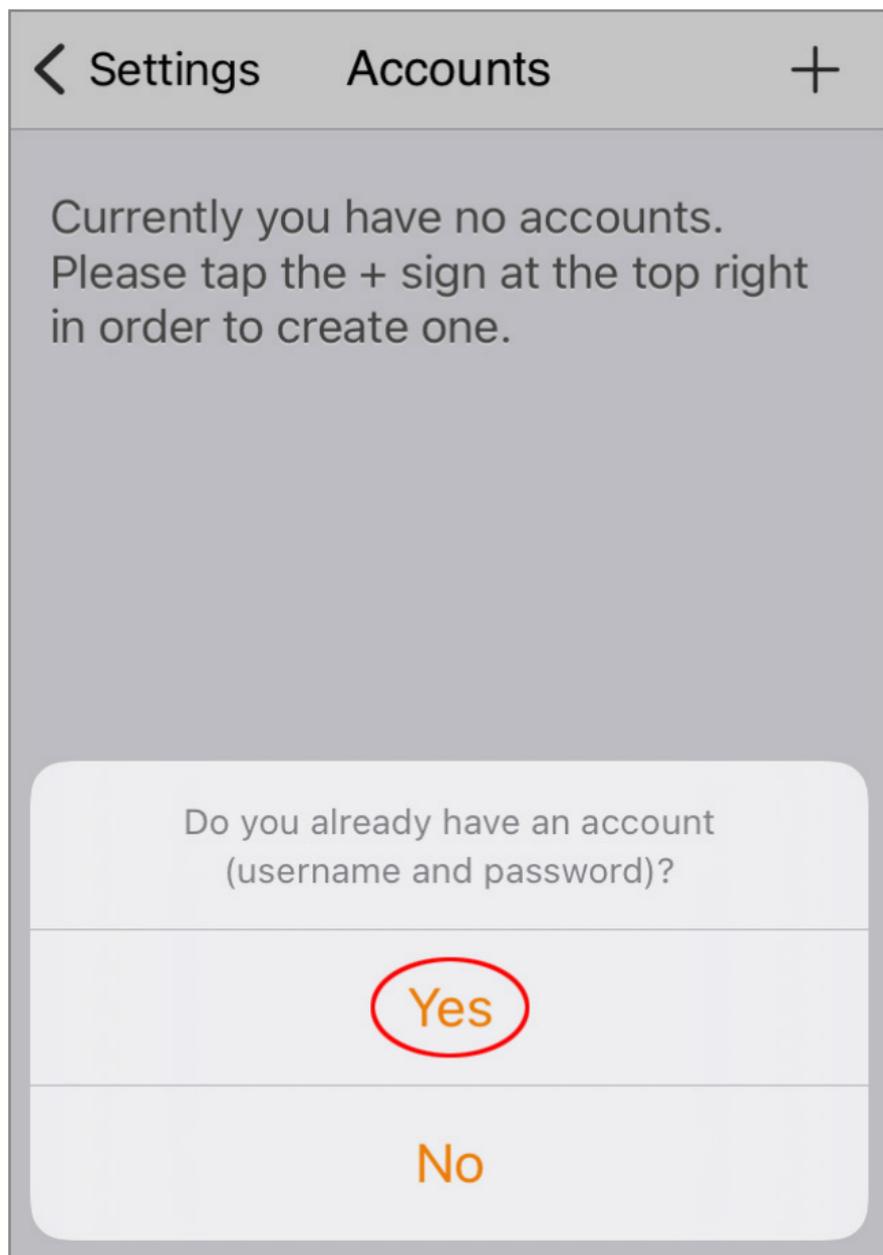

2-10. Input settings manually, so tap "**Manual configuration**".

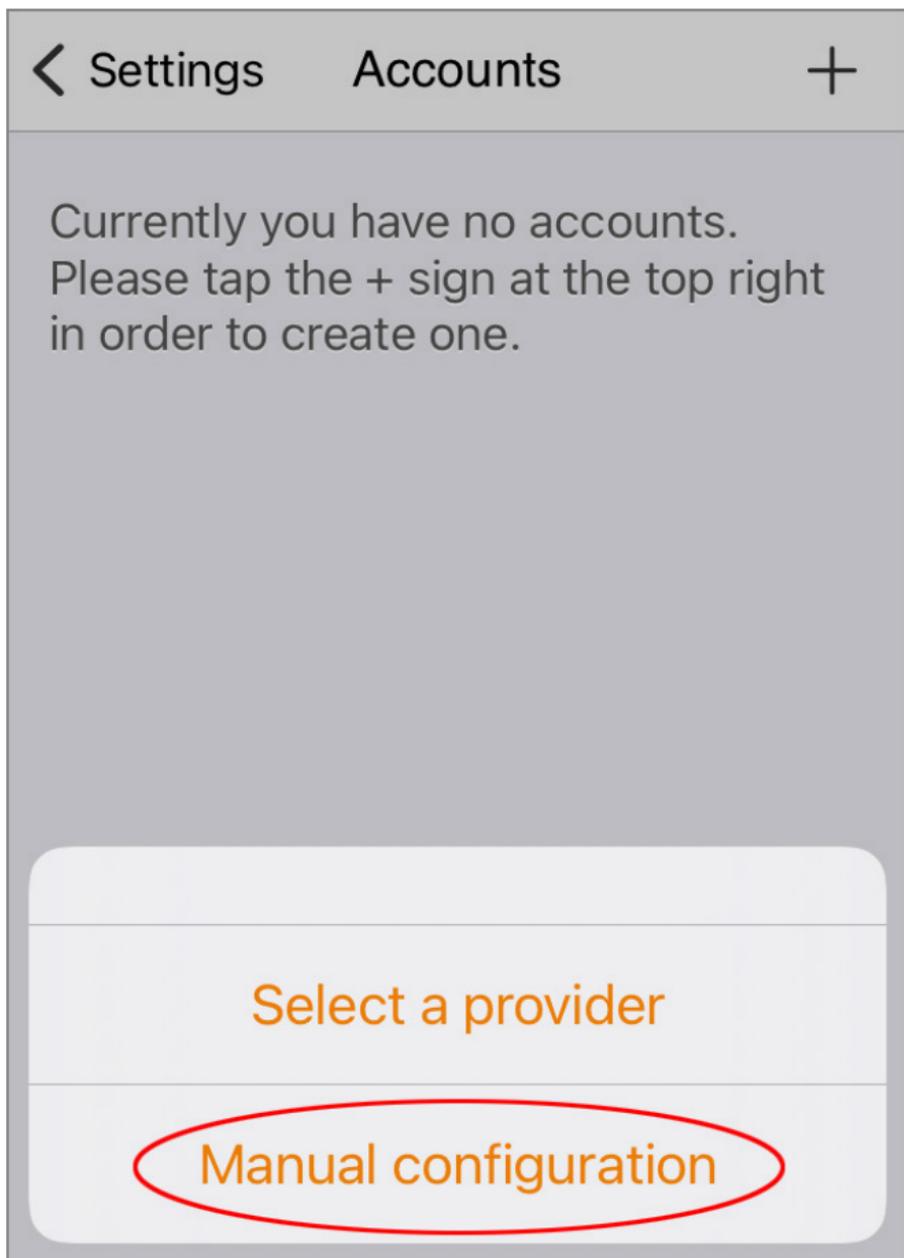

2-11. Select "**SIP account**" for the account type.

← Back Create account

CHOOSE AN ACCOUNT TYPE

 SIP account >

 IAX account >

2-12. Enter the extension account information notified by VoiP+ as follows.

Accounts SIP Account 

Register

SIP OPTIONS

Account name: #####

Domain: sp.voipplus.net

User name: #####

Password: *****

Caller ID:

Account Name : 7-digit extension number

Domain : sp.voipplus.net

User name : 7-digit extension number

Password : SIP password

2-13. When you have entered the extension account information, tap "**Register**" to register.

Accounts	SIP Account	
Register		
SIP OPTIONS		
Account name:	#####	
Domain:	sp.voipus.net	
User name:	#####	
Password:	*****	
Caller ID:		

2-14. If successfully registered, the status will be displayed as "OK".

Accounts SIP Account 

Registration Status: OK

Unregister

SIP OPTIONS

Account name: #####

Domain: sp.voipplus.net

User name: #####


Password:

Caller ID: [caller id]


At this time, if there is an error in the entered account information, "Failed" will be displayed. Please be careful not to input wrong information, because you will be blocked if you fail several times in a row.

Returning to Accounts, registered extension accounts are listed.

Registered extensions are marked with a green "✓". Unregistered extensions are marked with a red "X".

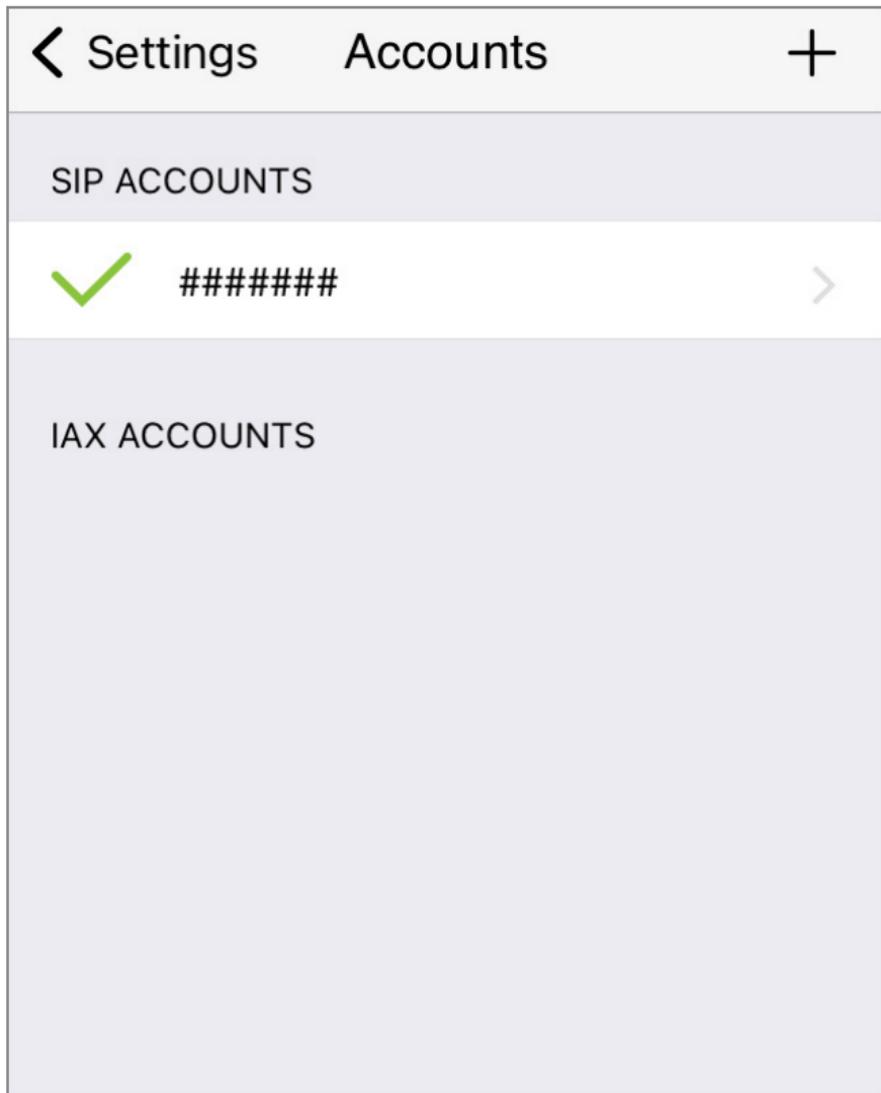

2-15. Return to Home and tap "Dialpad" in the lower menu. If "Ready" appears in green below the extension number at the top of the screen, the phone is ready to receive calls.

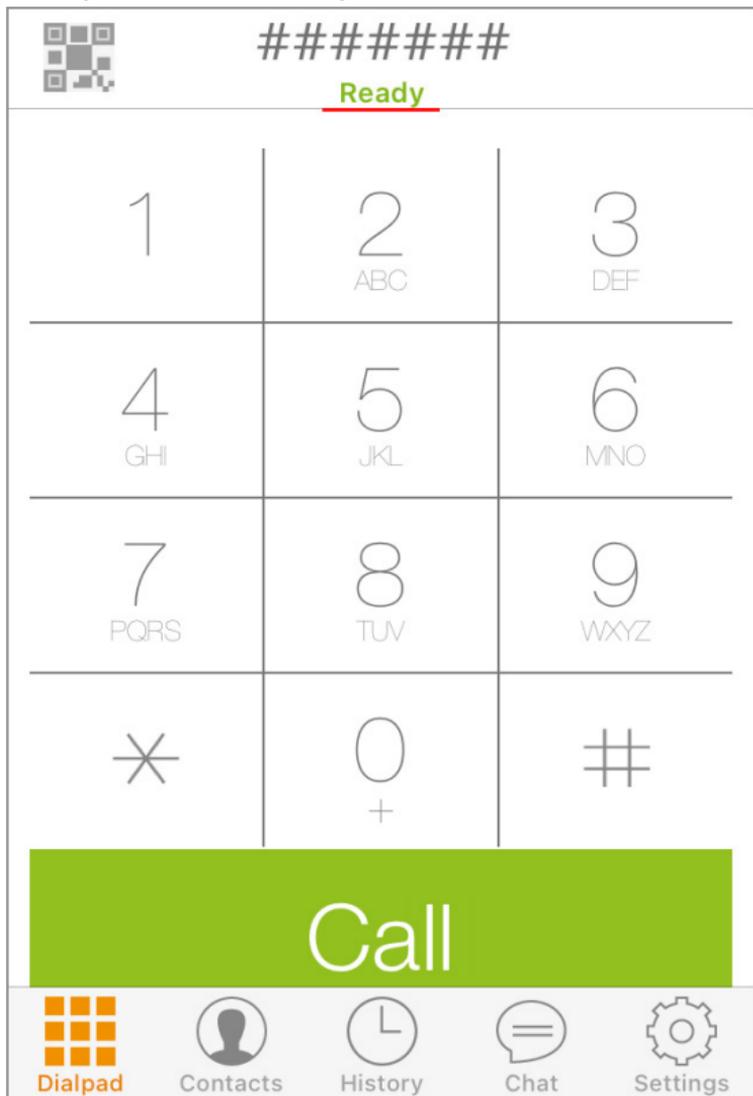

The setup is now complete.

3. Information

For call to Japan, you can enter from the area code.

For international calls, dialed by **002, country code, area code excluding the first zero, local number.**

Older than iPhone5s, may be disconnected when you switch the network to WiFi and 4G

In this case, if you log in as a member on the website and turn on **Registry Alert**, you will be notified by email at disconnection.

Thank you for using VoiP+.